

PRODUCT  
SPECIFICATION



# TMS 320

METAL SEPARATOR



# ACCURATE & EFFICIENT SEPARATION

The TMS 320 is the ultimate in mobile separation, offering operators unrivalled application flexibility, production rates and serviceability. A highly efficient drum magnet and eddy current rotor combined with superior material flow, ensure accurate material separation. The TMS 320 is ideally suited for metal recovery from compost, biomass, IBA (Incinerated Bottom Ash) and waste.





# TMS 320

## Superior Material Flow & Precise Processing



The TMS 320 metal separator offers quick and easy set-up and will be ready to process in minutes with no tools required. An intuitive push button control panel, variable speed drum magnet and eddy current belt, combined with a splitter system that offers accurate real time adjustment, enables the operator to easily configure the machine to suit a wide range of applications.


In partnering with Eriez, a world authority in magnetic separation technologies, the TMS 320 incorporates the renowned RevX ST22 eddy current separator and rare earth drum magnet. The RevX ST22 eddy current separator has a premium 22-pole neodymium rotor which spins at just 3000RPM. This rotor is encased in an ultra-thin carbon fibre shell, and a thin but durable PVC belt, ensuring that the intense field produced by the ST22 is fully employed to provide the most effective separation results. The 2m wide high-strength neodymium radial pole magnet is utilised for optimum iron recovery.

Designed to provide operators with unrivalled levels of service access, all conveyors are built to a modular design allowing each one to be removed independently for ease of maintenance. The splitter system can be moved away from the eddy current unit to provide unobstructed access to both the splitter system and eddy current rotor. This innovative feature also enables the TMS 320 to fold within a 3m wide transport width and places it as a market leader.

Being electrically driven the TMS 320 can be powered by either the onboard gen set or using mains electricity supply. This flexibility provides the end user with reduced operating costs, fuel usage, emissions and noise levels. The TMS 320 is available in both tracked and static variants. The tracked unit is fitted with heavy duty crawler tracks and offers excellent site mobility making it a great solution for difficult terrain.




# ▼ KEY FEATURES

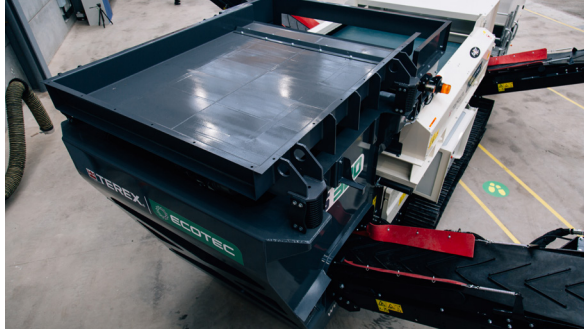


1.9m (6' 3") x 2.4m (7' 10") highly aggressive vibrating pan feeder with low throw and high G to maximise material spread and feed



Variable speed 2m (6' 7") wide high strength neodymium radial pole drum for optimal ferrous metal recovery

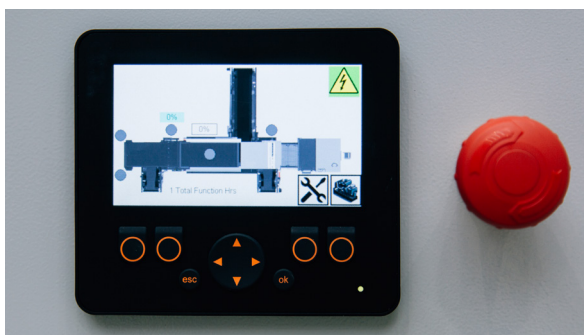

User friendly colour display offering simple operation and diagnostics  
Customisable settings allow operators to tailor the machine for specific applications

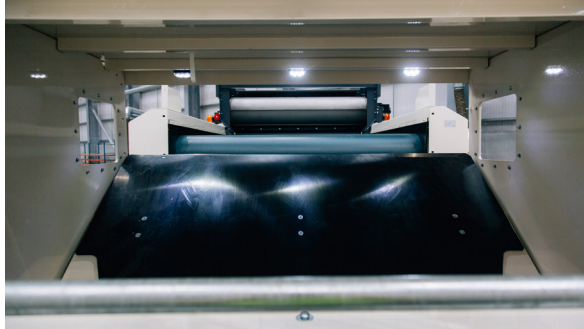

22 pole neodymium eddy current rotor surrounded with an ultra-thin carbon fibre shell to maximise non-ferrous metal recovery



Low noise 60kVa generator offering excellent fuel consumption and serviceability



Change over switch as standard to allow the use of onsite mains power



Movable splitter box allowing optimal material flow whilst enabling the machine to fold within 3m wide transport width

Unrivalled maintenance access



# TECHNICAL DATA



<b>TRANSPORT DIMENSIONS</b> Length: 10.0m (32' 9") Width: 3.0m (9' 10") Height: 3.3m (10' 9") Weight: 19,500kg (43,000lbs) (dependent on options)	<b>EDDY CURRENT UNIT</b> 22-Pole Neodymium Assembly Eccentric High Gauss Design +1mm Particles Separation 2m (6' 7") Wide with 5.5kW Rotor Drive 3mm Thick Transporter Belt 1.5kW Variable Speed Belt Drive	<b>PRODUCT CONVEYOR</b> Variable Speed 900mm (36") 3 Ply Chevron Belt 3 + 1.5 Covers 3.6m (11' 10") Discharge Height
<b>WORKING DIMENSIONS</b> Length: 10.3m (33' 9") Width: 10.2m (33' 5") Height: 3.8m (12' 5")	<b>POWER UNIT</b> 60kVa (400v, 50Hz) Generator Perkins® 1104D-E44TG3, EU Stage 3A Engine 220 Litre Fuel Tank 37kW IE3 Electric Motor c/w Hydraulic Gear Pump and Electrical Control Panel allowing machine to run in either Diesel or Electric mode Suitable for Voltages varying from 380V - 440V at 50Hz (For all other supply bases contact the factory with specific requirements)	<b>HYDRAULIC OIL</b> ISO Grade 46
<b>FEEDER</b> Vibrational Pan 1.9m (6' 3") x 2.4m (7' 10") 2 x 0.9kW Vibrator Motor	<b>FERROUS CONVEYOR</b> Variable Speed 650mm (25") Chevron Belt 1.9m (6' 3") Discharge Height on RHS of Machine	<b>UNDERCARRIAGE</b> Heavy Duty Tracks with 400mm (16") Shoes 2.5m (8' 2") Sprocket Centres Control Operation of Tracks via Handheld Set with 5m (16' 5") Connection Lead
<b>DRUM MAGNET</b> 2m (6' 7") Wide High Strength Neodymium Radial Pole for Maximum Iron Recovery 2.2kW Variable Speed Motor, ø380mm (15") Stainless Steel Construction	<b>NON-FERROUS CONVEYOR</b> Variable Speed 650mm (25") Chevron Belt 1.8m (5' 11") Discharge Height	<b>GENERAL FEATURES</b> CE Compliant Low Level Remote Conveyor Greasing
		<b>OPTIONS</b> Static Variant Air Compressor Ferrous Conveyor - Discharge to LHS of Machine Telemetry Additional Remote Control for Tracking

Specification subject to change without notice

# ▼ CUSTOMER SUPPORT

With you every step of the way

We work with our customers to understand their equipment needs to select the product most suited to their business requirements. Terex Ecotec customer support incorporates a range of services including parts, technical support, warranty and financial services.



## The Right Part at the Right Time

Terex Ecotec has a full inventory of genuine Terex parts through our global support locations and dealer network. We are committed to getting the right parts delivered at the right time. Using genuine Terex parts ensures optimum performance and reliability.



## Warranty Delivering on our promise so you can keep yours

Terex Ecotec warrants its new equipment to be free of defects in material or manufacture for a specified period from the date the equipment is first used.



## Expert technical support

Terex Ecotec provide highly qualified service personnel to ensure that we have the ability to provide technical support when our customers need it. This support is provided in conjunction with our dealer network. We ensure our customers are supported throughout the lifecycle of their machine.



## Terex Financial Services Financing that works for you

Terex Ecotec are able to offer finance solutions to our customers. Our team of finance professionals know the importance of working closely with customers to understand their unique business challenges as well as their financial goals and requirements. Obtaining financing is often a time-consuming task, so we work hard to provide a reliable, flexible and responsive service.



**Delivering On Our Promises,  
So You Can Keep Yours.**



### DUNGANNON

32 Farlough Road  
Dungannon, Co. Tyrone  
BT71 4DT, Northern Ireland

Tel: +44 (0) 28 87 718 500

### NEWTON

22 Whittier Street  
Newton, New Hampshire  
USA, 03858

Tel: +1 (603) 382 0556

---

Dealer Stamp:

---

---

September 2020. The material in this document is for information only and is subject to change without notice. Terex Ecotec assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. Due to continual product development we reserve the right to change specifications without notice. Any product performance figures given in this brochure are for guidance purposes only. This information does not constitute an expressed or implied warranty or guarantee, but shows text examples provided. These results will vary depending on product settings, screen media and sizes, feed source and types of material being processed. Photographs are for illustrative purposes only. Some or all of the machines in the illustrations may be fitted with optional extra. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries © 2020 Terex Corporation.